



# INSTALLATION INSTRUCTIONS

Part Number BM-1299

**This filter fits:** SEE CATALOG FOR CURRENT APPLICATIONS

Congratulations, you have purchased the finest air filter that money can buy. With proper care, this filter will last 1 million miles or more. This filter can be used in a stock machine, with no modifications required. If any engine modifications have been made tuning/jetting adjustments may be required. There are special installation instructions, so please follow the procedures outlined below to ensure the K&N Filtercharger® seals properly.

## INSTALLATION

1. Remove the stock air filter.
2. Apply the provided K&N Sealing Grease around the K&N Filtercharger® sealing bead and on the underside of the top lip. (Fig. 1) This will help with installation.
3. Slide the K&N Filtercharger® into the air box making sure it is completely seated.
4. Reinstall the air filter cover.

## REMOVAL

To remove the K&N Filtercharger®, carefully pry up the shorter end of the air filter with a screwdriver until you can grab the element with your hand. (Fig. 2)

**THESE INSTRUCTIONS MUST BE FOLLOWED EVERY TIME THE FILTER IS SERVICED, OTHERWISE THE FILTER MAY NOT SEAL, AND DAMAGE TO THE ENGINE COULD RESULT.**

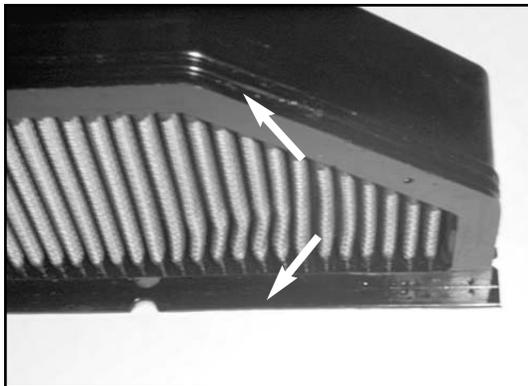


Fig. 1



Fig. 2